

TERMINAL PRENSADO DKO 45° - CONE 24



Terminal sem solda

Séries leve / pesada

CODIGO M2AR416

M - Macoflan

2 - Trama --- 2 Tramas --- 4 Tramas ---- 6 Interlock


A - Aço Carbono ---- I Aço Inox

R - rosca

4 - curva 45 graus

16 - métricas passo 1,5

26 - métricas passo 2,0

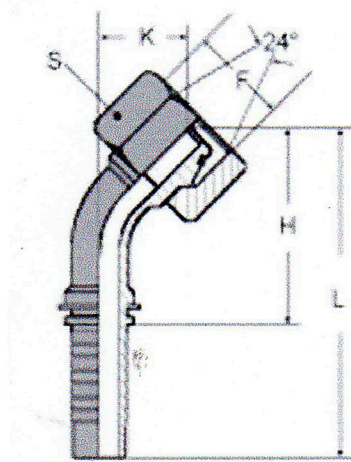

série	Ø		F	cone 24 °	medidas				
	pol	traço			H	L	K	S	
L (leve)	1/4"	-4	M12 x 1,5	6L	43	71,5	19	17	M2AR416-12-04 T6
	1/4"	-4	M14 x 1,5	8L	39,5	68	16	17	M2AR416-14-04 T8
	1/4"	-4	M16 x 1,5	10L	40,5	69	16,5	19	M2AR416-16-04 T10
	3/8"	-6	M18 x 1,5	12L	53	83,5	19	22	M2AR416-18-06 T12
	1/2"	-8	M22 x 1,5	15	62	95	22,5	27	M2AR416-22-08 T15
	5/8"	-10	M26 x 1,5	18	79	115	26	32	M2AR416-26-10 T18
	3/4"	-12	M30 x 2	22	87	127,5	31	36	M2AR426-30-08 T22
	1"	-16	M36 x 2	28	109	164	40	41	M2AR426-36-16 T28
	1.1/4"	-20	M45 x 2	35	137,5	198,5	53	50	M2AR426-45-20 T35
	1.1/4"	-20	M52 x 2	42	-	-	-	-	M2AR426-52-20 T42
	1.1/2"	-24	M52 x 2	42	161,5	231,5	56,5	60	M2AR426-52-24 T42
S (pesada)	1/4"	-4	M14 x 1,5	6S	24	52	28	17	M2AR416-14-04 T6
	1/4"	-4	M16 x 1,5	8S	24	52	28	19	M2AR416-16-04 T8
	1/4"	-4	M18 x 1,5	10S	24	52	30	22	M2AR416-18-04 T10
	3/8"	-6	M20 x 1,5	12S	34	64	35	24	M2AR146-20-06 T12
	1/2"	-8	M22 x 1,5	14	41	74	42	27	M2AR416-22-08 T14
	1/2"	-8	M24 x 1,5	16	41	74	42	30	M2AR416-24-08 T16
	5/8"	-10	M30 x 2	20	49	85	53	36	M2AR426-30-10 T20
	3/4"	-12	M30 x 2	20	58	99	59	36	M2AR426-30-12 T20
	3/4"	-12	M36 x 2	25	58	99	59	46	M2AR426-36-12 T25
	1"	-16	M36 x 2	25	74	129	71	46	M2AR426-36-16 T25
	1"	-16	M42 x 2	30	74	129	71	50	M2AR426-42-16 T30
	1.1/4"	-20	M42 x 2	30	92	153	86	50	M2AR426-52-20 T30
	1.1/4"	-20	M52 x 2	38	92	153	86	60	M2AR426-52-20 T38
	1.1/2"	-24	M52 x 2	38	108	179	96	60	M2AR426-52-24 T38